ShockWave™

Feet

The ShockWave incorporates a Spherical Shock Unit (SSU) into the classic PROTEOR foot design with its proprietary EnduraCore® hybrid composite technology. The SSU provides both vertical shock absorption and transverse rotation giving everyday and active K3/K4 patients a more natural and comfortable experience.

Water-resistant*

*Water-resistant: Safe for contact with water and occasional submersion. Rinse immediately with fresh water and dry following exposure to water, particularly salt or chlorinated.



Features and Benefits

- Spherical Shock Unit (SSU) provides ultimate vertical shock absorption at heel strike and also an transverse rotation of +/-15 degrees easing stress and pressure on the residual limb
- Full-length heel initiates plantar flexion at heel strike • for better ground compliance and maximized energy return
- Split keel and heel delivers added motion improving stability, comfort, and confidence on various terrains
- EnduraCore® technology provides ideal strength, • flexibility, durability, and high energy return for more natural motion and less fatigue during the day





Spherical Shock Unit

(SSU)

Split-keel and heel for increased inversion/

Cosmetics



Sandal toe: sizes 23-28cm only



Ordering Information

Trial Period - Please speak to Customer Services or a Steeper Product Manager to organise a trial.

Note: Once the definitive foot has been purchased there is no trial period.

Impact Level Descriptions

Moderate: Daily activities include up to unlimited walking, climbing stairs and occasional moderate lifting (this does not include running).

High: Daily activities include fast walking, jogging, running, lifting heavy objects and/or recreational sports.

Ordering Exa	Ordering Example - NF20523L			
Part Number	Category	y S	ize (23-30)	Left/Right
NF20	5	2	3	L
Sandal Toe Ordering Example - NF20523SL				
Part Number	Category	Size	Sandal Toe	Left/Right
NF20	5	23	S	L

Includes foot shell, heel bumper kit and Spectra[®] Sock All foot shells are available in Light, Medium and Dark colours

Category Selection	Category Selection			
Weight (kg)	Impact Level			
	Low	Mod	High	
44-52	1	1	2	
53-59	1	2	3	
60-68	2	3	4	
69-77	3	4	5	
78-88	4	5	6	
89-100	5	6	7	
101-116	6	7	8	
117-130	7	8	-	
131-147	8	-	-	

Toe Configuration	be Configuration		
Code	Description		
Leave Blank	Regular		
S	Sandal Toe**		

**Sandal toe only available in sizes 23-28cm


Product Specification

.

Weight Limit	Impact Level	Activity Level	Weight of Unit
147kg	МН	K3/K4	978g Size 26cm
Sizes (cm)		Warranty	
23-30		3 years Foot shell - 6 month	าร
		То	ardar ca

66 www.steepergroup.com

Feet - PROTEOR - Shockwave™

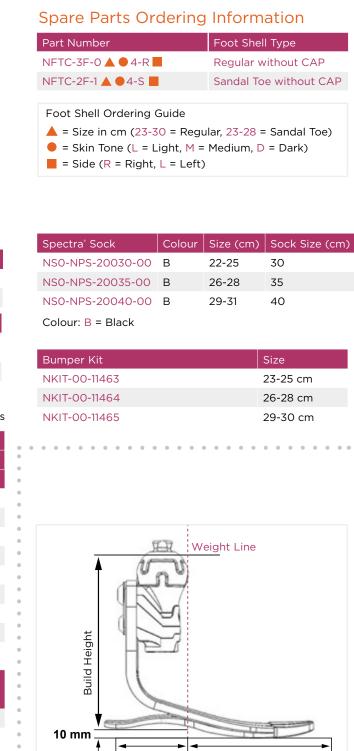

Build Height and Weight			
Size (cm)	Build Height (cm)	Foot inc. Shell	
23-25	17.6	897g	
26-28	18.9	978g	
29-30	20	1131g	

2/3

To order contact customerservices@steepergroup.com

1/3